CUSTOMER'S APPROVAL: _____ DATE: _____

FIRST ARTICLE SAMPLE REQUIRED: ☐ YES, ☐ NO.

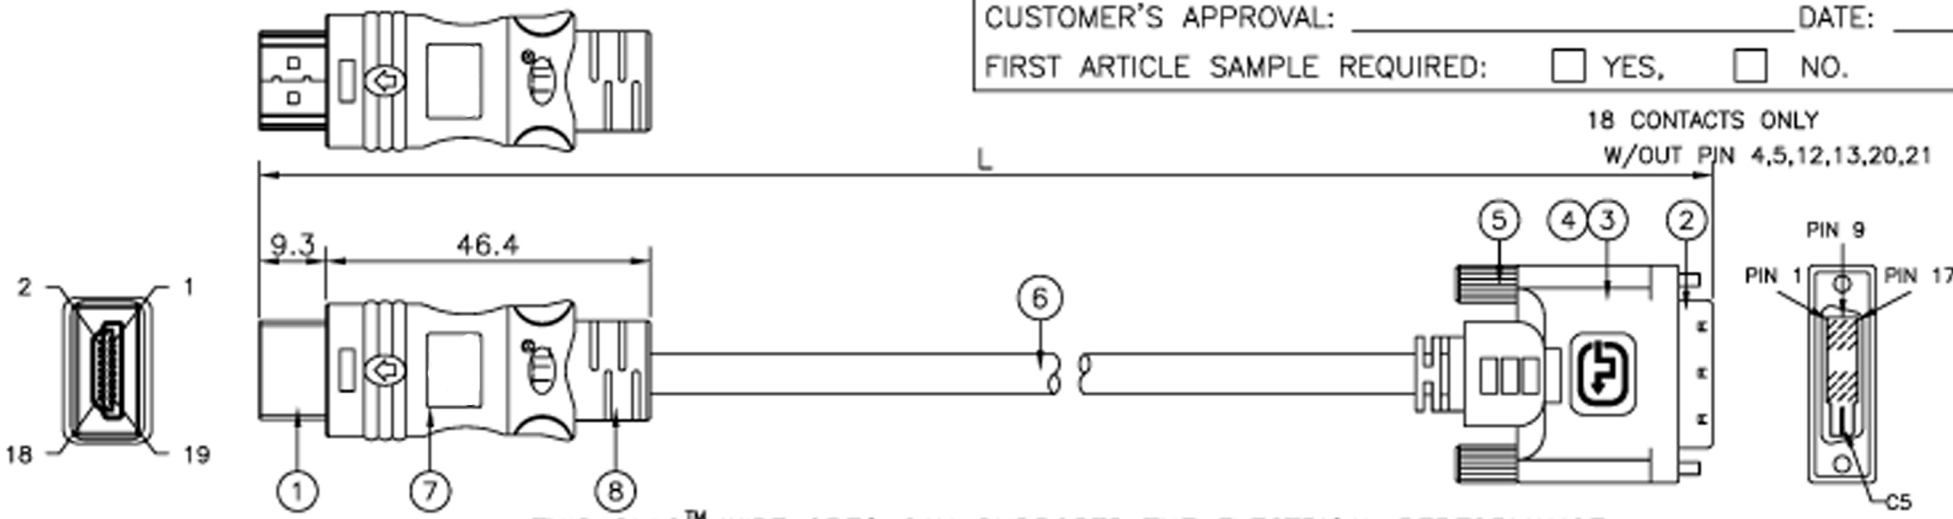

THIS SLAC™ WIRE SPEC CAN SUPPORTS THE ELECTRICAL PERFORMANCE ABOVE 5 METERS,AS HEREUNDER.

NOTE:

1. THIS ITEM CONTAINS PAT. US 6,287,148 B1 RF-BLOK™ SHIELDING DESIGN.
2. WIRE MARKING:

E193793 ЯU AWM 20276 80°C 30V VW-1

DVI SINGLE LINK DIGITAL SUPER LOW ATTENUATION CABLE (SLAC™)

PINOUT CONFIGURATION

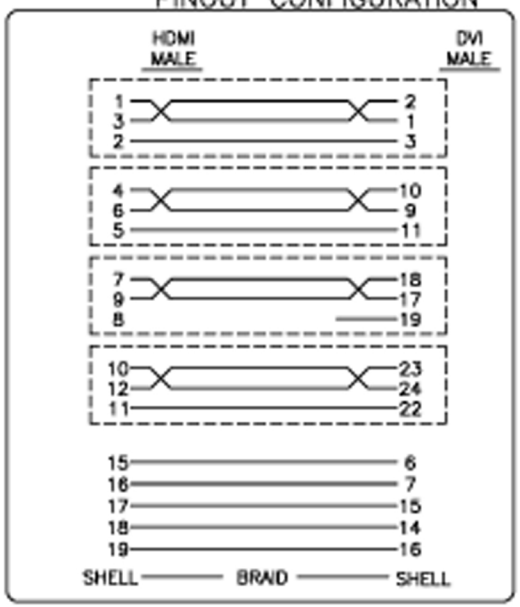

CUSTOMER'S P/N	L±(mm)
AK3744	10000±200
AK3746	15000±250
AK3748	20000±250

UNIT: mm

ITEM	DESCRIPTION	QTY.	UNIT
1	HDMI TYPE A 19PIN CONNECTOR,MALE W/GOLD PLATED	1	PCS.
	PINS UL94V-0		
2	DVI MALE CONNECTOR W/18 CONTACTS ONLY(18+1)	1	PCS.
3	BLACK MOLDED PVC HOOD	1	PCS.
4	PAT. US 6,287,148 B1 RF-BLOK™ SHIELDING METAL CAN	1	PCS.
5	BLACK #4/40 THUMBSCREW	2	PCS.
6	(100Ω SHIELDED TWIN PAIRS)x4+5C WIRE; AL-FOIL+85% BRAID;	L	mm.
	BLACK PVC JACKET.		
7	PAT. US 6,287,148 B1 RF-BLOK™ NICKEL PLATING SHIELDING METAL CAN	1	PCS.
8	BLACK MOLDED PVC HOOD	1	PCS.

REVISED DETAILS

REV.	DESCRIPTION	DATE	REVISED BY

Part number:	Revision: ORIG.
RFQ number:	Drawing #: 94061604
Drawn by: STANLEY	Scale: None
Checked by:	Date:

AK3744